

Expertise. Experience. Innovation.



WEIRO® Site Welfare Trailer *SOLID*



WEIRO® Site Welfare Trailer *SOLID* type BM-A to BM-E, two axles, with ring hitch, towing speed 25 km/h, overrun brake, body length from 4,0 m to 8,0 m.

Expertise. Experience. Innovation.



Site Welfare Trailer WEIRO® **SOLID** type BM-A to BM-E

Specification

Chassis

- painted chassis
- solid chassis made from u profile steel
- ring hitch
- front axle on centre pivot plate without suspension, track width 150 cm
- automatic reverse overrun brake
- hand brake on front axle
- Rear axle rigid axle, unbraked, track width 150 cm
- lighting equipment 12 V

Body

- nailed wooden framework
- plastic coated, profiled, galvanized steel sheet on outer walls. Standard RAL 7032 other RAL colours by request
- inside lining plastic coated wood material board, optional 10 mm particle board
- rock wool wall insulation
- edges made from galvanized steel, red/white coated

Floor


- painted, water resistant particle board
- polystyrene thermal insulation
- painted particle board with optional skid resistant PVC floor covering bonded over the entire surface

Door/Window

- steel door 750 x 1875 mm, profile cylinder lock, optional breaking and entering security
- door check strap
- solid galvanized stair, 3-step
- sliding window 750 x 850 mm with safety glass; optional breaking and entering security

Roof

- Strong, arched design
- Galvanized steel, folded lengthways for strength, 2 galvanized steel gutters
- rock wool insulation
- inside lining plastic coated wood material board

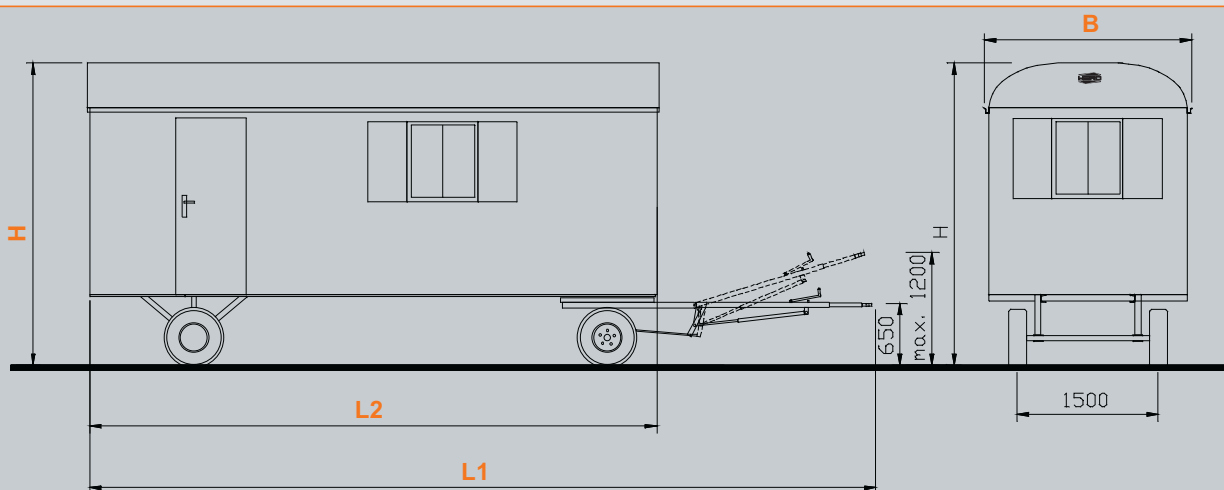

Dimensions	Total Length L1	Body Length L2	Body Width B	optional	Inside Height	Outer Height H
Solid BM-A	apprx. 635 cm	apprx. 400 cm	apprx. 220 cm	apprx. 240 / 250 cm	apprx. 230 cm	apprx. 320 cm
Solid BM-B	apprx. 735 cm	apprx. 500 cm	apprx. 220 cm	apprx. 240 / 250 cm	apprx. 230 cm	apprx. 320 cm
Solid BM-C	apprx. 835 cm	apprx. 600 cm	apprx. 220 cm	apprx. 240 / 250 cm	apprx. 230 cm	apprx. 320 cm
Solid BM-D	apprx. 935 cm	apprx. 700 cm	apprx. 220 cm	apprx. 240 / 250 cm	apprx. 230 cm	apprx. 320 cm
Solid BM-E	apprx. 1035 cm	apprx. 800 cm	apprx. 220 cm	apprx. 240 / 250 cm	apprx. 230 cm	apprx. 320 cm